



## Features

- 10.4" TFT LCD display, LED Backlit, XGA 1024 \*768;
- Intel Baytrail J1900 2.0Ghz Quad-core processor;
- Multi-point projected capacitive touch, or 5-wire resistive touch;
- Aluminum-magnesium alloy, anodized treatment, Modular designed;
- DC 9~24V, with over-current, over-voltage and polarity protection;
- 2\*GLAN, 5\*USB, 6\*COM, 1\*HDMI, 1\*VGA, Mic-in/Line-out;
- Fan-less & Rich IO design, Panel mount, VESA, Front IP65 protection.




## Specification

<b>Hardware &amp; System</b>	BIOS	SPI AMI EEI BIOS
	CPU	Intel Baytrail J1900, Quad-core 2.0Ghz, burst to 2.42Ghz
	Memory	SO-DIMM, DDR3L-1333, Max. up to 8GB (Compatible with DDR3)
	Storage	1*mSATA (Optional support 1* 2.5"SATA)
	Graphic	Intel HD Graphic Gen7
	Network	2* Intel I211AT (Optional 3G/4G/Wi-Fi)
	Audio	On-board Realtek ACL 282 audio controller
	Expansion	1* Full size Mini-PCle slot
	Watch dog	0~256 seconds programmable
	OS	Win7, Win8, Win embedded, Win10, Linux
<b>IO interface</b>	COM	6x RS232 (Optional support 1x RS485)
	Ethernet	2x RJ45, 10/100/1000 Mbps
	Audio	Mic-in/Line-out
	USB	1x USB3.0, 4x USB2.0
	Display	1x HDMI, 1x VGA
	Power	1x 2 pins, phenix terminal
<b>LCD Display</b>	Size/Type	10.4" TFT LCD
	Resolution	1024 * 768 (XGA)
	Brightness	350 nits
	Backlit & MTBF	LED backlit & 30 000hours
	Display area	211.2 * 158.4
<b>Touchscreen</b>	View angle	75/75/75/75
	Type	Projective capacitive touchscreen / Wide temp. 5-wires Resistive touchscreen, EETI controller
	Touch points	Multi points touch, max. up to 10 points (Pcap) / Single touch (Resistive)
	Durability	>100 000 000 times (PCap) / 35 million clicks@ 250g (Resistive)
	Surface hardness	Glass, Mohs 6H hardness (PCap) / PET film laminated, flat design (Resistive)
<b>Structure</b>	Special treatment	Anti-fingerprint (PCap)
	Structure and surface	Magnesium-Aluminum alloy, sand blasting, anodized treatment
	Mount method	Panel mount (Optional support VESA 75/100)
	Cooling system	Large area finned heat sink
	Overall dimension	264 * 205.6 * 84.0 (mm)
	Cut-out dimension	253 * 195 (mm)
	Net weight	4.0 KG
	IP protection	Front Panel IP65
<b>Power &amp; Environmental</b>	Operating temp.	-20 ~ +70°C
	Storage temp.	-30 ~ +80°C
	Relative Humidity	10 ~ 95% @ 10C (Non-condensation)
	Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak
	Shock	10G/Peak (11 ms)
	Power input	DC 9~24V

Power consumption	Around 30W
EMC	CE/FCC Class A

Dimension (mm)

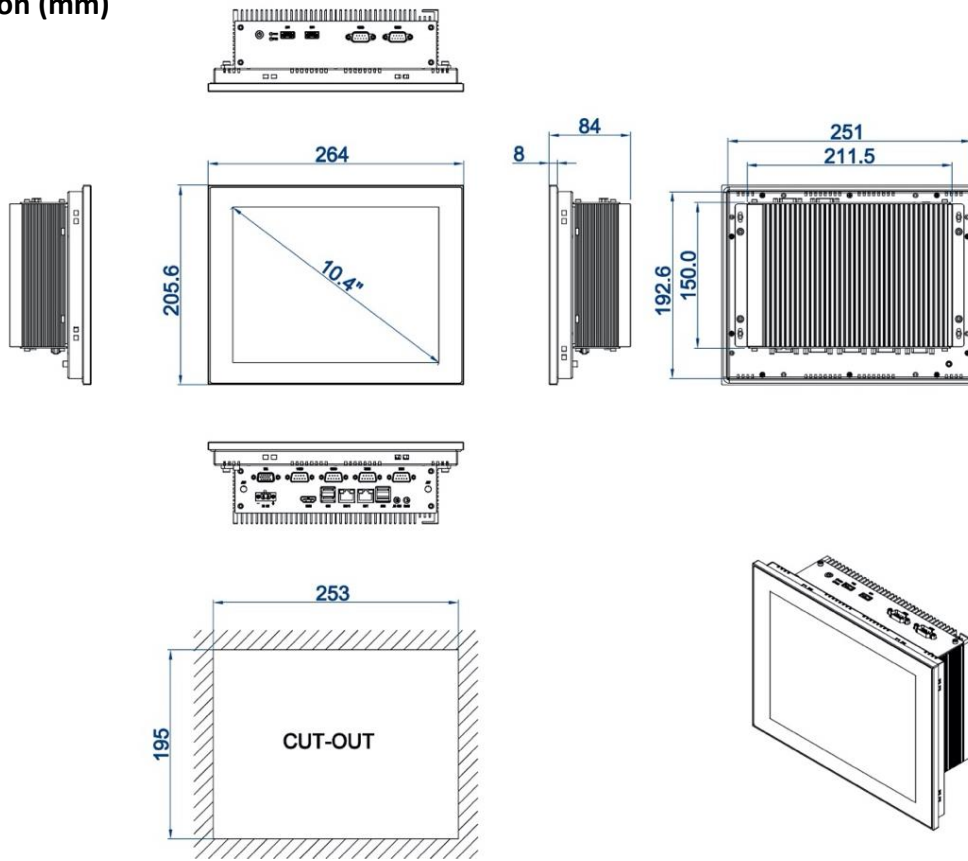

Ordering info.

Part no.	Description
PPC-104-C1-CT	10.4", 1024 * 768, Intel Baytrail J1900, Pcap. touch, 2*GLAN, 5*USB, 6*COM, 1*HDMI, 1*VGA, Mic-in/Line-out, DC 9~24V
PPC-104-C1-RT	10.4", 1024 * 768, Intel Baytrail J1900, Resistive touch, 2*GLAN, 5*USB, 6*COM, 1*HDMI, 1*VGA, Mic-in/Line-out, DC 9~24V
-2G / -4G / -8G	Memory: SO-DIMM, DDR3, 2GB/4GB/8GB Memory
-64GS / -128GS / -256GS / -512GS	mSATA SSD: 64GB/128GB/256GB/512GB 2.5" SATA SSD: 256GB/512GB 2.5" HDD: 1TB/2TB/4TB
TBOX-WIFI	Wi-Fi module, with Antenna
TBOX-WIBlu	Wi-Fi with BT integrated module, with Antenna
EC25-AU-PCKit	All network 4G/LTE module, With Antenna
TA-VESAB1	Additional VESA bracket for VESA mounting

Packing List

■ 1x Standard Product
■ 1x 60W PSU (Power Supply)
■ 1x Power cable & Plug
■ 8x Panel mount metal clips

