



## Features

- Widescreen 15.6" TFT LCD display, WLED Backlit, Full HD 1920 \* 1080;
- Intel 8<sup>th</sup> -gen. Whiskey Lake -U, Celeron Core i3/i5/i7 processor;
- Multi-point projected capacitive touch, or 5-wire resistive touch;
- Aluminum-magnesium alloy, anodized treatment, Modular designed;
- DC 9~24V, with over-current, over-voltage and polarity protection;
- 2\*GLAN, 8\*USB, 6\*COM, 1\*HDMI, 1\*VGA, Line-out;
- Fan-less & Rich IO design, Panel mount, VESA, Front IP65 protection.




## Specification

<b>Hardware &amp; System</b>	BIOS	SPI AMI EEI BIOS			
	CPU	Celeron 4205U, Dual core	i3-8145U, Dual core	i5-8265U, Quad-core	i7-8565U, Quad-core
		1.8Ghz	2.1Ghz, burst to 3.9Ghz	1.5Ghz, burst to 3.9Ghz	1.8Ghz, burst to 4.6Ghz
	Memory	SO-DIMM, DDR4, max. up to 16GB			
	Storage	1*mSATA (Optional support 1* 2.5" SATA)			
	Graphic	Intel HD Graphics 620			
	Network	2* Intel I211AT (Optional 3G/4G/Wi-Fi)			
	Audio	On-board Realtek ACL 269 audio controller			
	Expansion	1* Full size Mini-PCIe slot			
	Watch dog	0~256 seconds programmable			
OS	Win10, Linux				
<b>IO interface</b>	COM	6x RS232 (Support 1x RS485)			
	Ethernet	2x RJ45, 10/100/1000 Mbps			
	Audio	Line-out			
	USB	4x USB3.0, 4x USB2.0			
	Display	1x HDMI, 1x VGA			
	Power	1x 2 pins, phenix terminal			
<b>LCD Display</b>	Size/Type	15.6" TFT LCD			
	Resolution	1920 * 1080 (FHD)			
	Brightness	400 nits			
	Backlit & MTBF	LED backlit & 50 000hours			
	Display area	344.23 * 193.54			
	View angle	70/70/60/60			
<b>Touchscreen</b>	Type	Projective capacitive touchscreen / Wide temp. 5-wires Resistive touchscreen, EETI controller			
	Touch points	Multi points touch, max. up to 10 points (Pcap) / Single touch (Resistive)			
	Durability	>100 000 000 times (PCap) / 35 million clicks@ 250g (Resistive)			
	Surface hardness	Glass, Mohs 6H hardness (PCap) / PET film laminated, flat design (Resistive)			
	Special treatment	Anti-fingerprint (PCap)			
<b>Structure</b>	Structure and surface	Magnesium-Aluminum alloy, sand blasting, anodized treatment			
	Mount method	Panel mount (Optional support VESA 75/100 mount)			
	Cooling system	Large area finned heat sink			
	Overall dimension	395.6 * 247.9 * 84.0 (mm)			
	Cut-out dimension	385 * 237 (mm)			
	Net weight	5.0 KG			
	IP protection	Front Panel IP65			
<b>Power &amp; Environmental</b>	Operating temp.	0 ~ +60°C			
	Storage temp.	-20 ~ +70°C			
	Relative Humidity	10 ~ 95% @ 10C (Non-condensation)			
	Vibration	50 ~ 500 Hz, 1.5G, 0.15mm peak to peak			
	Shock	10G/Peak (11 ms)			

Power input	DC 9~24V
Power consumption	Around 40W
EMC	CE/FCC Class A

Dimension (mm)

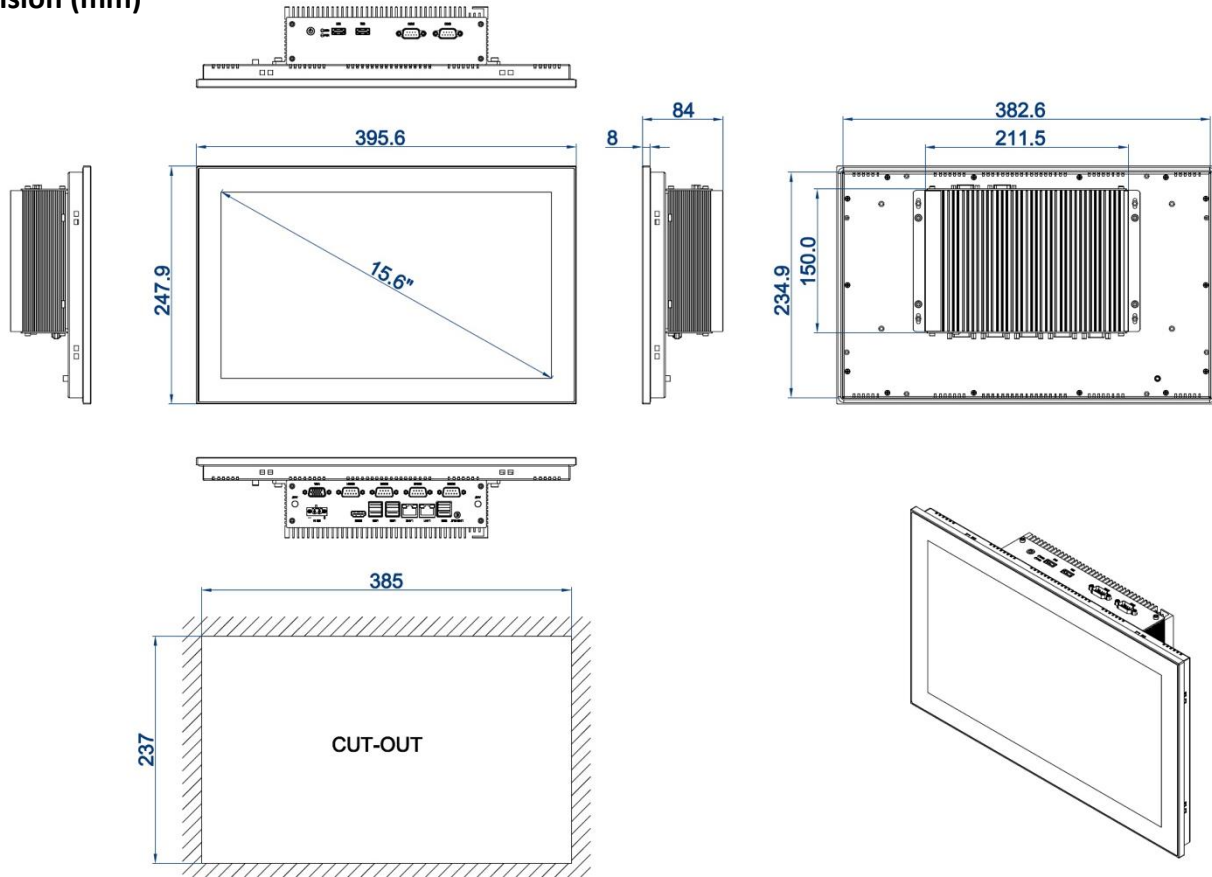

Ordering info.

Part no.	Description
PPC-156H-W0-CT	15.6", 1920 * 1080, <b>Celeron 4205U</b> , Pcap. touch, 2*GLAN, 8*USB, 6*COM, 1*HDMI, 1*VGA, Line-out, DC 9~24V
PPC-156H-W1-CT	15.6", 1920 * 1080, <b>Core i3-8145U</b> , Pcap. touch, 2*GLAN, 8*USB, 6*COM, 1*HDMI, 1*VGA, Line-out, DC 9~24V
PPC-156H-W2-CT	15.6", 1920 * 1080, <b>Core i5-8265U</b> , Pcap. touch, 2*GLAN, 8*USB, 6*COM, 1*HDMI, 1*VGA, Line-out, DC 9~24V
PPC-156H-W3-CT	15.6", 1920 * 1080, <b>Core i7-8565U</b> , Pcap. touch, 2*GLAN, 8*USB, 6*COM, 1*HDMI, 1*VGA, Line-out, DC 9~24V
PPC-156H-W0-RT	15.6", 1920 * 1080, <b>Celeron 4205U</b> , Resistive touch, 2*GLAN, 8*USB, 6*COM, 1*HDMI, 1*VGA, Line-out, DC 9~24V
PPC-156H-W1-RT	15.6", 1920 * 1080, <b>Core i3-8145U</b> , Resistive touch, 2*GLAN, 8*USB, 6*COM, 1*HDMI, 1*VGA, Line-out, DC 9~24V
PPC-156H-W2-RT	15.6", 1920 * 1080, <b>Core i5-8265U</b> , Resistive touch, 2*GLAN, 8*USB, 6*COM, 1*HDMI, 1*VGA, Line-out, DC 9~24V
PPC-156H-W3-RT	15.6", 1920 * 1080, <b>Core i7-8565U</b> , Resistive touch, 2*GLAN, 8*USB, 6*COM, 1*HDMI, 1*VGA, Line-out, DC 9~24V
-4G / -8G / -16G	Memory: SO-DIMM, DDR4, <b>4GB/8GB/16GB</b> Memory
-64GS / -128GS / -256GS / -512GS	mSATA SSD: <b>64GB/128GB/256GB/512GB</b> 2.5" SATA SSD: <b>256GB/512GB</b> 2.5" HDD: <b>1TB/2TB/4TB</b>
TBOX-WIFI	Wi-Fi module, with Antenna
TBOX-WIBlu	Wi-Fi with BT integrated module, with Antenna
EC25-AU-PCKit	All network 4G/LTE module, With Antenna
TA-VESAB1	Additional VESA bracket for VESA mounting

## Packing List

- |   |                            |
|---|----------------------------|
| ■ | 1x Standard Product        |
| ■ | 1x 90W PSU (Power Supply)  |
| ■ | 1x Power cable & Plug      |
| ■ | 8x Panel mount metal clips |

